

ECO LINNE W is an economical and practical lighting range; it allows you to build large continuous lines using simple, easy-to-use accessories. This solution only allows suspended fixing by steel cable.

With LEDs with a high color rendering index ($Ra > 80$) and high overall luminous efficacy. LEDs with a long service life ($> 50,000h$), with different color temperatures available.



PRODUCT DESCRIPTION

Assembly	Suspension;
Profile	Aluminum, thermolacquered in color;
Application	Commercial spaces; Circulation areas; Exhibition areas; Offices;
CRI	$Ra > 80$;
Lens	DA - Double asymmetric; A - Asymmetric S - 29° ; W - 59° ; X - 93° ; (in PMMA)

ELECTRICAL SPECIFICATIONS

Max. Supply Current	350 mA;
Power Factor	$> 0,90$;
Class of electrical protection	I;

STANDARDS (PRODUCTS MANUFACTURED ACCORDING TO:)

EN 60598-1:2004

PACKAGE

Model	Dimension (mm)	Weight (Kg)
1718	2339x300x95	2.4
3436	4678x300x95	4.9


FINISHES

Wh White (RAL 9110)

Other finishes on request

MECHANICAL DRAWINGS (mm)

L1 (mm)
1718
3436

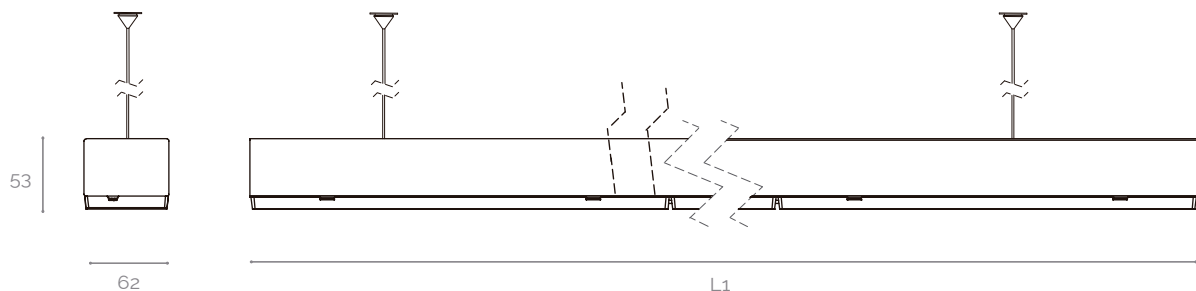

NOTE: Other dimensions on request (2875mm module);

PHOTOMETRIC SPECIFICATIONS

MODEL	PERFORMANCE	POWER (W)	PHOTOMETRIC CODE	LUMINOUS FLUX (lm)	SYSTEM EFFICIENCY* (lm/W)
1718	HO	77	830	8838	115
			840	9591	124
			850	10447	135
	HE	65	830	7673	118
			840	8341	129
			850	9077	140
3436	HO	151	830	17675	117
			840	19182	127
			850	20895	138
	HE	127	830	15346	121
			840	16682	131
			850	18155	143


NOTE: Nominal values at temperature (Tp - 25°C) | Lens - 95° | ON/OFF | (°) - Normal system (without control);
The luminous flux and input power of the luminaire are indicative values valid for an ambient temperature of 25°C. The actual flux emitted by the luminaire depends on environmental conditions (e.g. temperature and pollution) and may vary according to specific configurations. The reported values are subject to the tolerances in technology.

HO - High output flux;
HE - High efficiency;

ACCESSORIES

- Top end of line;
- Joining structure;
- Suspension kit;


POLAR DIAGRAM

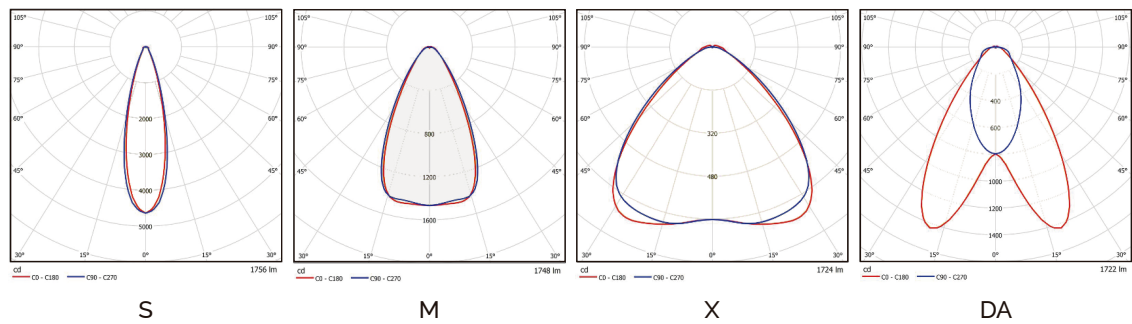


ORDER EXAMPLE

PRODUCT FAMILY	PERFORMANCE	PHOTOMETRIC CODE	LENS	FINISHING	OPTIONS
ECO LINNE W (1718)	HE	830	DA	Br	DALI

ILLUSTRATIVE IMAGES



NOTES



RISK OF
ELECTRIC SHOCK

This device is suitable for pricking out.
Light source not user-replaceable.

For more information on the different architectures, solutions and functionalities available, please contact Lightenjin.
Under the general terms of the supply of our services and/or equipment, Lightenjin declines any responsibility for the use or purpose assigned to them, which are the sole and exclusive responsibility of the customer.
Lightenjin reserves the right to change the information contained in this document without prior notice.

LIGHTENJIN II - LIGHTING INDUSTRY, LDA

PARQUE EMPRESARIAL DO CASARÃO, AVENIDA DAS 2 RODAS, LOTE 36A. 3750-041 AGUADA DE CIMA | PORTUGAL
tel: +351 234 080 117 | fax: +351 234 640 064 | geral@lightenjin.pt

