


OPUS is a range of products specially designed for service and office buildings. The range is versatile and easily adaptable to the different requirements of each space, from the point of view of its geometry, application and possible diffusers.

With LEDs with a high Color Rendering Index (Ra>80) and a high overall luminous efficacy of between 119 and 142 lm/W. LEDs with a long service life (>50,000h), with different color temperatures available.



PRODUCT DESCRIPTION

Assembly	Salient; Suspension;
Body	Sheet metal, thermolacquered in color;
Application	Commercial spaces; Offices; Conference rooms;
CRI	Ra >80;
Diffuser	Pris - Prismatic UGR<1g; (anti-chaining)

ELECTRICAL SPECIFICATIONS

Max. Supply Current	275 mA;
Power Factor	> 0,90;
Class of electrical protection	I;

STANDARDS (PRODUCTS MANUFACTURED ACCORDING TO:)

EN 60598-1:2004

FINISHES

Wh	White (RAL 9010)
-----------	------------------

Other finishes on request


PACKAGE

Model	Dimension (mm)	Weight (Kg)
600x600	610x610x100	5.4
300x600	360x360x60	3.1
300x1200	300x1200x60	5.2
300x1500	300x1500x60	6.6


MECHANICAL DRAWINGS (mm)

MODEL	L1 (mm)	L2 (mm)	L3 (mm)	CEILING HOLE (mm)
600x600 <small>3 LED lines</small>	597	597	40	580x580
600x600 <small>3 LED lines</small>	597	597	40	580x580
600x600 <small>4 LED lines</small>	597	597	40	580x580
300x600	297	597	40	280x580
300x1200	297	1197	40	280x1180
300x1500	297	1477	40	280x1460

OPTIONS



- *a 2 LIGHTING LINES
- *b 3 LIGHTING LINES
- *c 4 LIGHTING LINES

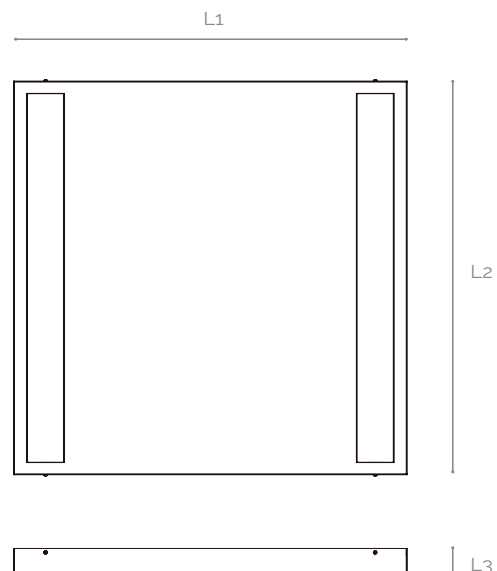

PHOTOMETRIC SPECIFICATIONS

MODEL	PERFORMANCE	POWER (W)	PHOTOMETRIC CODE	LUMINOUS FLUX (lm)	SYSTEM EFFICIENCY* (lm/W)
600x600 (2 LED lines)	HO	42	827	4945	119
			830	5166	124
			840	5461	132
			850	5461	132
	HE	30	827	3666	123
			830	3830	128
			840	4049	136
			850	4049	136
600x600 (3 LED lines)	HO	61	827	7417	122
			830	7749	127
			840	8192	134
			850	8192	134
	HE	44	827	5499	124
			830	5746	130
			840	6074	137
			850	6074	137
600x600 (4 LED lines)	HO	80	827	9889	123
			830	10332	129
			840	10922	136
			850	10922	136
	HE	58	827	7332	127
			830	7661	133
			840	8099	140
			850	8099	140
300x600	HO	42	827	4945	119
			830	5166	124
			840	5461	132
			850	5461	132
	HE	30	827	3666	123
			830	3830	128
			840	4049	136
			850	4049	136
300x1200	HO	80	827	9889	123
			830	10332	129
			840	10922	136
			850	10922	136
	HE	58	827	7332	127
			830	7661	133
			840	8099	140
			850	8099	140
300x1500	HO	99	827	12362	124
			830	12915	130
			840	13653	137
			850	13653	137
	HE	71	827	9166	128
			830	9576	134
			840	10123	142
			850	10123	142


NOTE: Nominal values at temperature (T_p - 25°C) | (*) - Normal system (without control);

The luminaire's luminous flux and input power are indicative values valid for an ambient temperature of 25°C. The actual flux emitted by the luminaire depends on environmental conditions (e.g. temperature and pollution) and may vary according to specific configurations. The reported values are subject to the tolerances in technology.

HO - High output flux;

HE - High efficiency;

POLAR DIAGRAM




○


ORDER EXAMPLE

PRODUCT FAMILY	PERFORMANCE	PHOTOMETRIC CODE	DIFFUSER	FINISHING	OPTIONS
OPUS S ECO PRIS (600x600)	H0	840	Pris	Br	-

ILLUSTRATIVE IMAGES



NOTES



RISK OF
ELECTRIC SHOCK

This device is not suitable for pricking out.
Light source not user-replaceable.
Power cable must be at least 3G1 type H05RN-F.

For more information on the different architectures, solutions and functionalities available, please contact Lightenjin.
Under the general terms of the supply of our services and/or equipment, Lightenjin declines any responsibility for the use or purpose assigned to them, which are the sole and exclusive responsibility of the customer.
Lightenjin reserves the right to change the information contained in this document without prior notice.

LIGHTENJIN II - LIGHTING INDUSTRY, LDA

PARQUE EMPRESARIAL DO CASARÃO, AVENIDA DAS 2 RODAS, LOTE 36A. 3750-041 AGUADA DE CIMA | PORTUGAL
tel: +351 234 080 117 | fax: +351 234 640 064 | geral@lightenjin.pt

