


OPUS SLIM is a solution specially developed for offices and service buildings. Its geometry and fixing system allows it to be applied in different ways on modular ceilings. Ultra-thin LED module with excellent lighting uniformity.

With LEDs with a high Color Rendering Index (Ra>80) and high overall luminous efficacy. Long-life LEDs (>50,000h), with different color temperatures available.

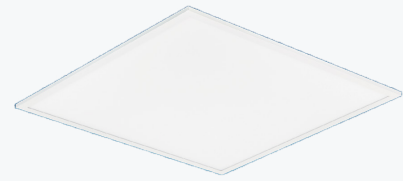

PRODUCT DESCRIPTION

Mounting Type	Surface mounted; Suspended; Recessed; (in model ceilings);
Body	Chapa, termolacada à cor;
Application	Commercial spaces; Offices; Exhibition areas;
CRI	Ra >80;
Diffuser	O - Opaline; Pris - Prismatic;

ELECTRICAL SPECIFICATIONS

Max. Power supply	1050 mA;
Power Factor	> 0,90;
Protection class	II ;

STANDARDS (PRODUCTS MANUFACTURED ACCORDING TO:)

- EN 60598-1:2004
- EN 62031
- EN 60598-2-1
- EN 60598-2-2

FINISHES


Wh White (RAL 9003)

Different finishes upon request

PACKAGE

Dimension (mm)	610x610x15
Weight (Kg)	2.0

MECHANICAL DRAWINGS (mm)

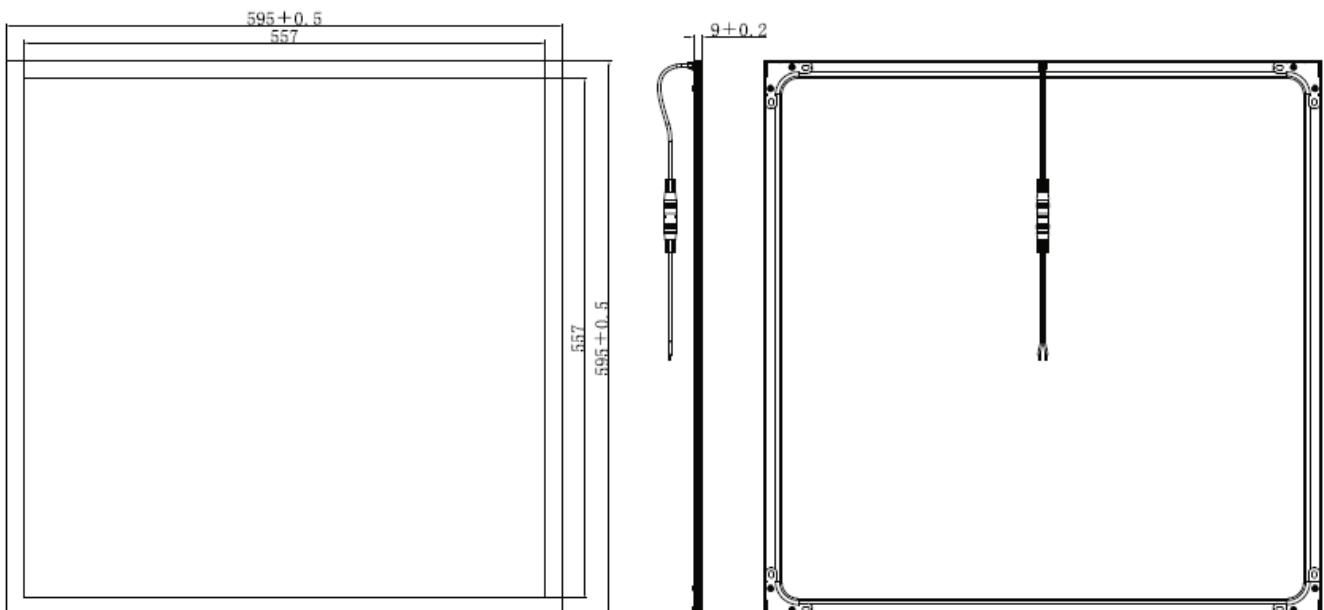


PHOTOMETRIC SPECIFICATIONS

DIFFUSER	PERFORMANCE	POWER (W)	PHOTOMETRIC CODE	LUMINOUS FLUX (lm)	SYSTEM EFFICIENCY* (lm/W)
O	HO	42	830	3652	87
			840	3905	93
			865	3905	93
	HE	27	830	2552	93
			840	2728	100
			865	2728	100
Pris	HO	42	830	4125	99
			840	4357	104
			865	4357	104
	HE	27	830	2834	104
			840	2992	109
			865	2992	109

NOTA: Nominal values at temperature (Tp - 25°C) | Opal diffuser | (*) - Normal system (without control);
 The luminous flux and input power of the luminaire are indicative values valid for an ambient temperature of 25°C. The actual flux emitted by the luminaire depends on environmental conditions (e.g. temperature and pollution) and may vary according to specific configurations. The reported values are subject to the tolerances in technology.

HO - High output flux;
 HE - High efficiency;


POLAR DIAGRAM




ORDER EXAMPLE

PRODUCT FAMILY	PERFORMANCE	PHOTOMETRIC CODE	DIFFUSER	FINISHING	OPTIONS
OPUS SLIM	HO	840	Pris	Br	-

ILLUSTRATIVE IMAGES



NOTES



RISK OF
ELECTRIC SHOCK

This device is not suitable for pricking out.
Light source not user-replaceable.
Power cable must be at least 3G1 type H05RN-F.

For more information on the different architectures, solutions and functionalities available, please contact Lightenjin.
Under the general terms of the supply of our services and/or equipment, Lightenjin declines any responsibility for the use or purpose assigned to them, which are the sole and exclusive responsibility of the customer.
Lightenjin reserves the right to change the information contained in this document without prior notice.

LIGHTENJIN II - LIGHTING INDUSTRY, LDA

PARQUE EMPRESARIAL DO CASARÃO, AVENIDA DAS 2 RODAS, LOTE 36A. 3750-041 AGUADA DE CIMA | PORTUGAL
tel: +351 234 080 117 | fax: +351 234 640 064 | geral@lightenjin.pt

