

UNNO PLUS is a steerable spotlight with integrated biomaterial, designed for accent lighting in commercial spaces. This product reflects the environmental concern combined with the guaranteed functionality and efficiency of recycled materials.

With LEDs with a high Color Rendering Index (Ra>90) and a high overall luminous efficacy of between 86 and 102 lm/W.
LEDs with a long service life (>50,000h).
Available in different color temperatures.



PRODUCT DESCRIPTION

Assembly	On three-phase rail;
Body	Polyethylene with coconut/hemp fiber;
Application	Commercial spaces; Museums; Murals;
CRI	Ra >90;
Reflector	S - 23°; M - 36°; W - 51°; XW - 90°;

ELECTRICAL SPECIFICATIONS

Max. Supply Current	1050 mA;
Power Factor	> 0,90;
Protection Class	II ;
Protection	

STANDARDS (PRODUCTS MANUFACTURED ACCORDING TO:)

EN 60598-1:2004

PACKAGE


Dimension (mm)	320x295x156
Weight (kg)	0.80

FINISHES

- PCc** Polyethylene with coconut fiber;
- PCn** Polyethylene with hemp fiber;

Other finishes on request

MECHANICAL DRAWINGS (mm)

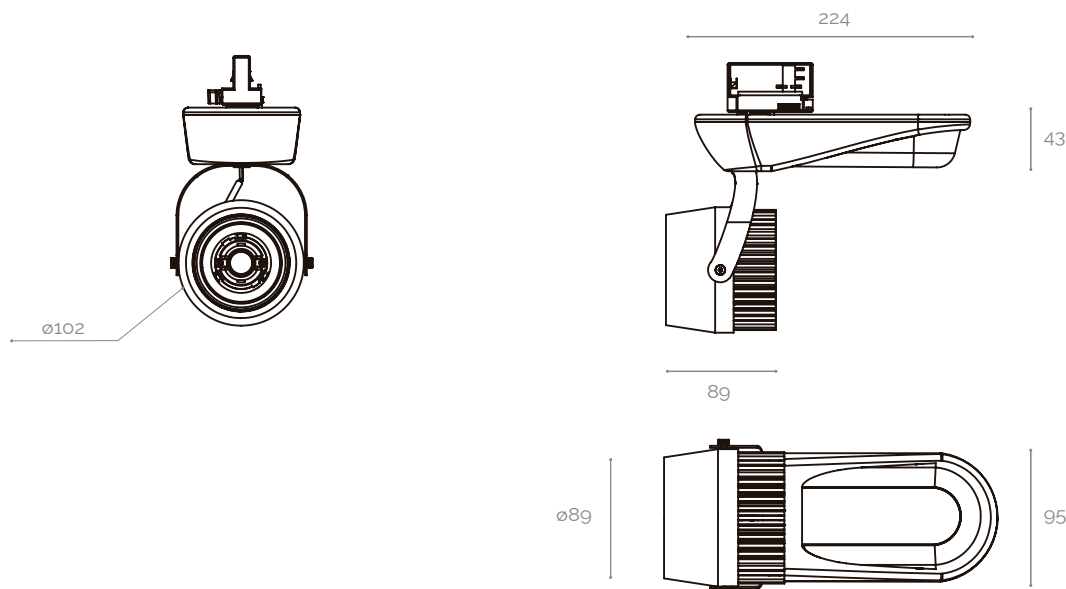

PHOTOMETRIC SPECIFICATIONS

REFLECTOR	PERFORMANCE	POWER (W)	PHOTOMETRIC CODE	LUMINOUS FLUX (lm)	SYSTEM EFFICIENCY* (lm/W)
S	HO	48	927	4146	86
			930	4297	89
			940	4645	96
	HE	36	927	3239	90
			930	3357	94
			940	3629	101
M	HO	48	927	4146	86
			930	4297	89
			940	4645	96
	HE	36	927	3239	90
			930	3357	94
			940	3629	101
W	HO	48	927	4146	86
			930	4297	89
			940	4645	96
	HE	36	927	3239	90
			930	3357	94
			940	3629	101
XW	HO	48	927	4191	87
			930	4344	90
			940	4695	97
	HE	36	927	3274	91
			930	3393	95
			940	3668	102


NOTE: Nominal values at temperature (T_p - 25°C) | (*) - Normal system (without control);

The luminaire's luminous flux and input power are indicative values valid for an ambient temperature of 25°C. The actual flux emitted by the luminaire depends on environmental conditions (e.g. temperature and pollution) and may vary according to specific configurations. The reported values are subject to the tolerances in technology.

HO - High output flux;

HE - High efficiency;


POLAR DIAGRAM

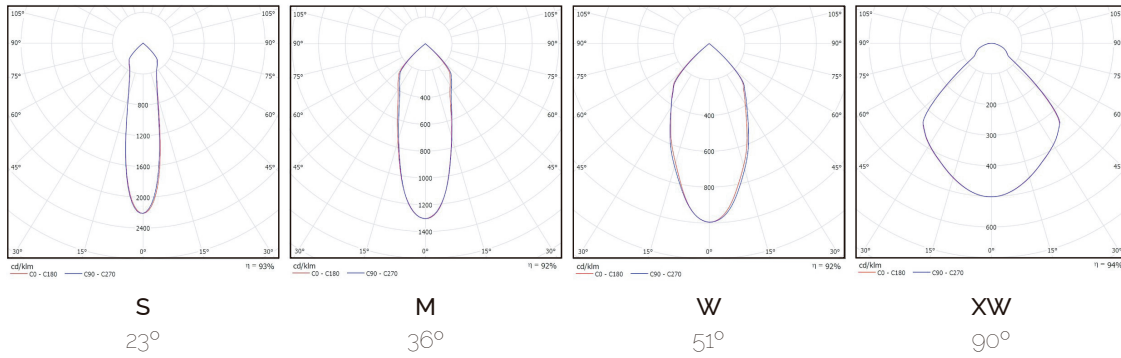

ORDER EXAMPLE

PRODUCT FAMILY	PERFORMANCE	PHOTOMETRIC CODE	REFLECTOR	FINISHING	OPTIONS
UNNO PLUS	HE	927	M	PCn	-

ILLUSTRATIVE IMAGES



NOTES

This device is suitable for pricking out.
Light source not user-replaceable.

For more information on the different architectures, solutions and functionalities available, please contact Lightenjin.

Under the general terms of the supply of our services and/or equipment, Lightenjin declines any responsibility for the use or purpose assigned to them, which are the sole and exclusive responsibility of the customer.

Lightenjin reserves the right to change the information contained in this document without prior notice.

LIGHTENJIN II - LIGHTING INDUSTRY, LDA

PARQUE EMPRESARIAL DO CASARÃO, AVENIDA DAS 2 RODAS, LOTE 36A. 3750-041 AGUADA DE CIMA | PORTUGAL
tel: +351 234 080 117 | fax: +351 234 640 064 | geral@lightenjin.pt

